

## ARTICLE

## DEVELOPMENT OF LOOP DESTRUCTIVE NETWORK ANALYSIS

Keyvanfar, A.<sup>1,2,3,4\*</sup>, Khorami, M.<sup>1</sup>, Avilés Díaz, Nelson Eduardo<sup>1</sup>, Cruz Cabrera, Marianela<sup>1</sup>, González Moya, Carmen<sup>1</sup>, Martínez Serra, Juan Carlos<sup>1</sup>, Gamboa Pérez, F<sup>1</sup>, Revelo Báez, C. Norma<sup>1</sup>, Estupiñán, M.<sup>1</sup>, Cadena Vallejo, R. E.<sup>1</sup>, Granja Alencastro, Pablo R.<sup>1</sup>, Alvansazyazdi, Mohammadfarid<sup>5</sup>, Paredes Lascano, I. S.<sup>1</sup>, Torres Paucar, M. A.<sup>1</sup>, Jácome Terán, William<sup>1</sup>, Larco Benítez, Myrian A.<sup>1</sup>, García, Anggie<sup>1</sup>, Vivanco, Diana<sup>1</sup>, A. Shafaghat<sup>3,4</sup>

<sup>1</sup>Facultad de Arquitectura y Urbanismo, Universidad Tecnológica Equinoccial, Calle Rumipamba s/n y Bourgeois, Quito 170147, ECUADOR

<sup>2</sup>Jacobs School of Engineering, University of California, San Diego, 9500 Gilman Dr. La Jolla, CA 92093, UNITED STATES

<sup>3</sup>Faculty of Built Environment, Universiti Teknologi Malaysia, Skudai 81310, MALAYSIA

<sup>4</sup>MIT-UTM MSCP Program, Institute Sultan Iskandar, Universiti Teknologi Malaysia, Skudai 81310, MALAYSIA

<sup>5</sup>Docente de la Facultad Ingeniería Ciencias Físicas y Matemática, Carrera Ingeniería Civil, Universidad Central del Ecuador, 170129, Quito, ECUADOR



## ABSTRACT

**Background:** Research on risk network analysis has not developed a simple method that is based on the destructive network function of nodes. **Objective:** Hence, we propose loop destructive network analysis (LDNA), a method of identifying the most influential relation and node to break (destruct) a major number of loops. For this purpose, general connectivity is reduced with minimal effort. **Case study:** LDNA is applied in the connective network of construction corporate social responsibility (CSR) implementation risks. The process and result are showcased and discussed to deliver a clear understanding on LDNA. **Significance:** This method will aid the success of resource planning in systematic risk reduction.

## INTRODUCTION: MODEL DEVELOPMENT

Risk analysis [1–7] and dynamic modeling [8–11] have been studied to show construction stakeholders the best identification and analysis approaches for risk networks. These networks contain negative loops, and possible issues resulted from negative loops in a continuous and stronger risk effect. Studies have focused on identifying and rectifying risk of nodes and reducing the effect of one node of risk to another. However, research on risk network analysis has not developed a simple method that is based on the destructive network function of nodes and relationships in loops of negative effects. In general, two perspectives that are based and depend on the nature of phenomena are used to destroy major loops in networks, namely, node- and relation-based loop destruction. A simplified model proposal framework for both perspectives is described below.

**Step 1. Identifying loops:** The loops are mapped and are classified on the basis of the number of nodes involved. For example, we should seek “n–1” type loops in the network of “n” node (e.g., 2-node type, 3-node type, .... “n”-node type of loops).

**Step 2. Identifying the most loop-destructive-single node(s) and/or relationship(s):** The destructive factor (DF) of each node and/or relation considered dividing the number of loops that the node involved in the total number of loops.

**Step 3. Identifying the best sequential partner(s) nodes and/or relations most loop-destructive-single node(s):** The highest DF that combines the minimum number of nodes and /or relations that ensures the maximum number of alternative solutions is reached. The result is introducing optimum node and/or relation combinations to destroy all the loops in the networks and to reach a full DF of 1.

## CASE STUDY

[Fig. 1] shows an observed conceptual network of issues in implementing construction corporate social responsibility (CSR). The network is adopted from Keyvanfar et al. (2018) [12]. Every node in [Fig.1] influences and is influenced by another set of nodes. The network possesses several negative infinitives loops. We must eliminate effective nodes in the network to optimize the reduction of the negative effect of the loops. The target problem is eliminating the minimum number of nodes to destroy the loops only. The proposed step-by-step node-based LDNA is discussed below.

**KEY WORDS**  
Risk analysis  
Dynamic modelling  
Network of risks

Received: 28 March 2018  
Accepted: 5 April 2018  
Published: 15 April 2018

\*Corresponding Author  
Email:  
alikeivanfar@gmail.com  
Tel.: +1-858-264-7085

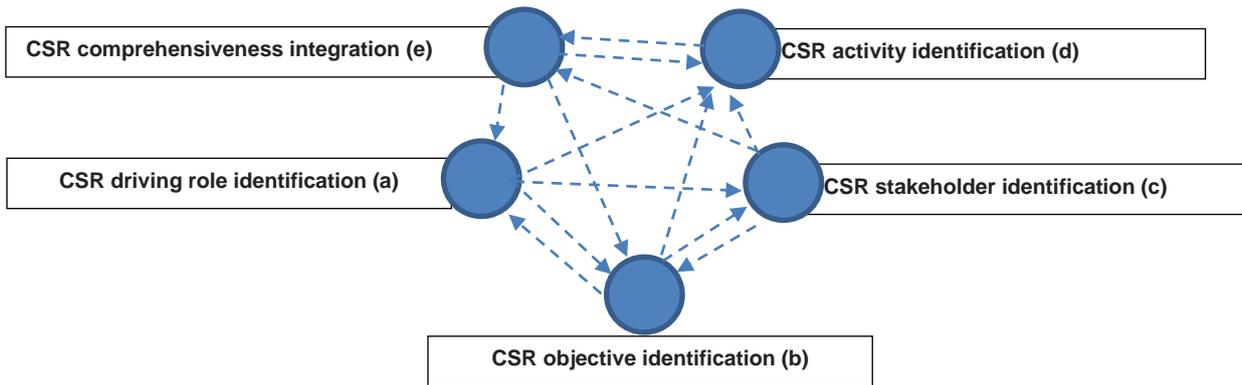


Fig. 1: Connective network of CSR implementation risks

**Step 1:** The loops are identified. Two-, three-, four-, and five-node loops are present. In [Fig.2], we classify the loops to introduce the investigated loop in the studied network. Fifteen loops are investigated, of which three, four, five, and three loops are two-, three-, four-, and five-node types, respectively.

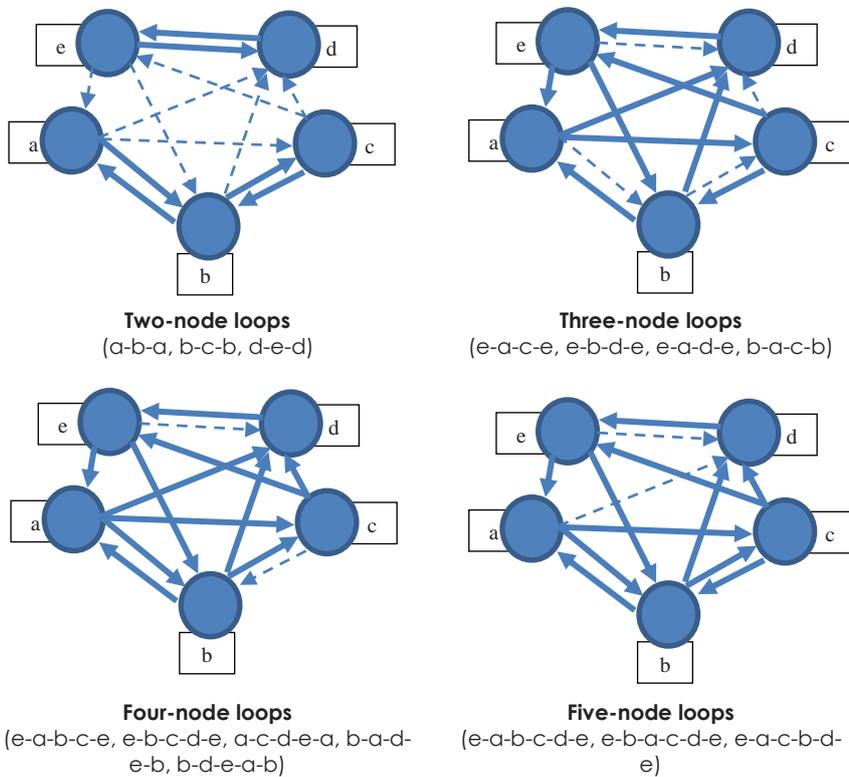


Fig. 2: Loop mapping of the connective network of CSR implementation risks

**Step 2:** The most involved nodes in the different loops are investigated. The DF for each node is calculated [Table 1]. The DF of each node considers dividing the number of loops that the node involved in the total number of loops. The DFs of nodes (e) and (c) of 0.8 and 0.6 are the highest and lowest, respectively.

Table 1: DF calculation based on investigating most repeated node in network loops of CSR issues

Node	Frequency	DF
a	11	0.733
b	11	0.733
c	9	0.6
d	10	0.667
e	12	0.8

**Step 3:** The best partners of the node (e) are investigated.

First, the DFs of every combination of the node (e) with other nodes are calculated [Table 2]. Alternative nodes (a), (b), (c), and (d) are available for possible partnership with (e) (For example, the partnership of (e) and (a) is accumulation of DF of (e) and (a) without double-counting the shared loops in which (e) and (a) both exist.). Within these alternatives, combinations of (e) with (a), (b), or (c) produce the maximum DF. (d) cannot be an effective partner because the DF of its combination with (e) is low and is even the same as that of (e) alone. Given that the DF of two-node combinations is not satisfactory (i.e., 1), we identify possible three-node combinations.

The DF of every combination of other nodes with (e-a) is listed in [Table 3]. The DF of the combination of (e-a) with (b) or (c) results in a satisfactory level of 1. The same result is obtained for the combination of (e-c), and (a) or (b) and for that of (e-b) and (a), or (c), or (d). The combination of (e-b) presents three alternatives to find the best third partner, whose partnership is preferred for destructive efforts to those of other alternatives introduced in step 2.

This will guide us to introduce the combination of node (e), and (b), and (a), or (c), or (d) as the result of the current LDNA case study, where (e) is the most loop-destructive node.

**Table 2:** DF calculation to establish the best two-node partnerships with most loop-destructive node

Node combination	Frequency	DF	Node combination	Frequency	DF
a and b	14	0.933	b and d	14	0.933
a and c	13	0.867	b and e	14	0.933
a and d	14	0.933	c and d	14	0.933
a and e	14	0.933	c and e	14	0.933
b and c	13	0.867	d and e	12	0.8

**Table 3:** DF calculation to establish best three-node partnership with most loop-destructive node

Node combination	Frequency	DF	Node combination	Frequency	DF
a and b and c	14	0.933	a and d and e	14	0.933
a and b and d	15	1	b and c and d	15	1
a and b and e	15	1	b and c and e	15	1
a and c and d	15	1	b and d and e	15	1
a and c and e	15	1	c and d and e	14	0.933

Addressing comprehensive CSR integration risks [node (e)] will help address network of risks and is the most efficient target to consider. Such findings are important because researchers can reconsider the future direction of this body of knowledge and effectively eliminate the problems of CSR implementation.

## SIGNIFICANCE

LDNA is partially showcased in this case study to introduce its steps and logic of approach to readers. The proposed method is only for small human-based decision-making group discussions. The method can significantly support relevant decision-making in reducing the negative loops of a network of risk. Although we use construction risk as the impetus for this research, the method is appropriate for general applications, and it will be introduced in upcoming manuscripts.

## CONFLICT OF INTEREST

The authors do not have any conflict of interest.

## ACKNOWLEDGMENTS

We would like to thank the anonymous referees for their helpful suggestions, which substantially improved this article. This research was conducted with support from the Universidad Tecnológica Equinoccial (UTE) (over 3,000 labor-hours of research for collecting and processing approximately 35,000 data points) as part of an initiative in the Ecuador construction industry. Our mission is to provide demand-driven results on sustainable solutions to current problems in the construction industry. We trust that the current collaborative research results in a mutually beneficial scenario for the future sustainable construction industry. Thus, we are honored to receive the valuable and dedicated support of Dr. Ricardo Hidalgo Ottolenghi, director of UTE, and Dr. Madam Myriam Larco, dean of the UTE Faculty of Architecture and Urbanism, whose foresight substantially contributed to the success of this program.

## FINANCIAL DISCLOSURE

The research was supported by the UTE (Ecuador)

## REFERENCES

- [1] Kangari R, Riggs LS. [1989] Construction risk assessment by linguistics. *IEEE transactions on engineering management*, 36(2): 126-131.
- [2] Tah JHM, Carr V. [2000] A proposal for construction project risk assessment using fuzzy logic. *Construction Management & Economics*, 18(4):491-500.

- [3] Carr V, Tah JHM. [2001] A fuzzy approach to construction project risk assessment and analysis: construction project risk management system. *Advances in engineering software*, 32(10-11):847-857.
- [4] Zeng J, An M, Smith NJ. [2007] Application of a fuzzy based decision making methodology to construction project risk assessment. *International journal of project management*, 25(6): 589-600.
- [5] Zavadskas EK, Turskis Z, Tamošaitiene J. [2010] Risk assessment of construction projects. *Journal of civil engineering and management*, 16(1):33-46.
- [6] Kokangül A, Polat U, Dağsuyu C. [2017] A new approximation for risk assessment using the AHP and Fine Kinney methodologies. *Safety science*, 91:24-32.
- [7] Ning X, Qi J, Wu C. [2018] A quantitative safety risk assessment model for construction site layout planning. *Safety science*, 104:246-259.
- [8] Nasirzadeh F, Nojedehi P. [2013] Dynamic modeling of labor productivity in construction projects. *International journal of project management*, 31(6): 903-911.
- [9] Javed AA, Zhan W, Pan W. [2018] A System Dynamics Framework of Drivers and Constraints to Enhancing Productivity of the Hong Kong Construction Industry. In *Proceedings of the 21st International Symposium on Advancement of Construction Management and Real Estate* (pp. 117-127). Springer, Singapore.
- [10] Tesfaye E, Berhan E, Kitaw D. [2018] A Comprehensive Literature Review on Construction Project Risk Analysis. *Global Business Expansion: Concepts, Methodologies, Tools, and Applications: Concepts, Methodologies, Tools, and Applications*, 289.
- [11] Chen X, Lu WS. [2018] Scenarios for Applying Big Data in Boosting Construction: A Review. In *Proceedings of the 21st International Symposium on Advancement of Construction Management and Real Estate* (pp. 1299-1306). Springer, Singapore.
- [12] Keyvanfar A, Khorami M, Gonzalez Moya, et al. [2018] Rethinking Construction Corporate Social Responsibility Practices: Construction Neighborhood, *IIOABJ*, 9(3): 9-13.